


Hydraulic pullers

BETEX HXP 2/3-arm pullers, self-centering



455

Max. shaft length mm

860

Max. spread mm



Use in combination with "BETEX Bearing Splitter" starting on page 72 and "BETEX Pump sets 700 bar" starting on page 122.

BETEX HXP


Safe and user-friendly dismounting of bearings, couplings, rings, etc.

- Separate 2-stage handpump available.
- Self-centering 2-arm or 3-arm puller, easy to convert.
- The arms slide inwards or outwards simultaneously.
- The stronger the pulling force, the tighter the jaws grip around the workpiece. Bending or deflecting is impossible.
- HXP503 is also available with mobile crane (HXPC 50T).
- Accessory sets available for the 8- and 12-ton versions.
- In useful carrying case.
- Includes adapter and shaft protector.



Advantages of unique self-centering pullers:

- ✓ The arms slide inwards or outwards simultaneously.
- ✓ Prevents damage to shaft and object being pulled.
- ✓ Can be operated by one person.
- ✓ Work efficiently and save time.

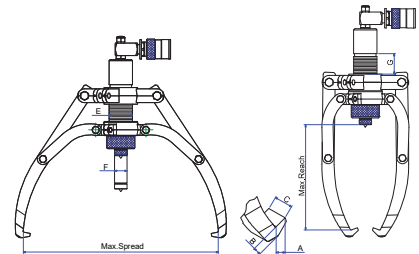

Type	Art. no.	Cap. tons	Oil cap. cm ³	Max. shaft length mm	Spread mm		Stroke H mm	A mm	B mm	C mm	E mm	F mm	G mm	Weight kg
					Min.	Max.								
HXP 83*	793600	8	100	280	110	460	85	13	10	22	22	40	42	14,0
HXP 123*	794600	12	135	300	120	515	85	13	13	27.5	25	70	50	17,0
HXP 203**	796600	20	315	325	160	520	111	15	16.5	29	28	70	60	36,7
HXP 303**	797600	30	490	415	190	620	111	20	27	33	40	62	80	56,5
HXP 503**	799600	50	1116	455	160	860	159	23	35	60	40	-	127	140,0

* incl. safety net ** incl. safety blanket